

# TURBO 165




PLC control touch screen panel



Auto pad clean



Platform in / out movement  
(Pad clean underneath)

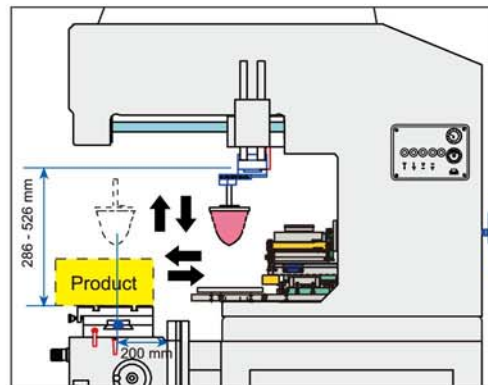

Maximum space for product/image with advantage of auto pad clean function

## FEATURES

- Single color automatic pad printer
- Rigid aluminium cast machine frame
- Platform in/out movement
- Pneumatic power machine operation
- Use sealed ink cup set up (able to print Ø140 mm image)
- Compatible with long life thin steel, polymer, 10 mm steel and laser ALP plates
- Dead-on printing plate registration for quick job change
- PLC control touch screen panel
- Automatic pad clean with programmable cleaning cycle
- Pad stroke & speed adjustment
- Special functions: double ink / print cycles, dwell and delay before print
- Digital pad stroke (DPS) for variable printing depth
- Hardened ground steel shaft with impregnated bushing ensure friction-free movement
- High speed and smooth machine operations

## SPECIFICATIONS

Ink cup size :	Ø125, 130, 150, 165 mm
Printing plate size :	150 x 300, 180 x 350, 200 x 350 mm
Max. speed : (dry cycle) *	800 / hr.
Pad compression :	3,016N
Pad cylinder :	Ø80 mm (optional: Ø100 mm)
Pad carriage stroke (in/out) :	298 mm
Power :	110/220V
Air consumption :	400 litre/min. (approx.)
Accuracy +/- :	0.05 mm
Size : (L x W x H)	1,240 x 722 x 1,805 mm
Weight :	327 kg (approx.)

\* Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.



[www.astor.com.au](http://www.astor.com.au)  
**Sydney** (02) 9663 3911  
**Melbourne** (03) 9465 0166  
**Adelaide** (08) 8234 5466

[www.kentpp.com](http://www.kentpp.com)

086M-0608